

SIKA GHANA

Solutions for Construction

Product catalogue 2026

BUILDING TRUST



Building Ghana's Future, Together

At Sika Ghana, we believe that every successful project begins with trusted solutions and lasting partnerships. As a global leader in specialty chemicals for construction and industry, Sika delivers innovative technologies that improve performance, enhance durability, and support sustainable development.

Our comprehensive product portfolio is designed to meet the evolving needs of contractors, engineers, architects, distributors, and homeowners. From concrete admixtures and waterproofing systems to roofing, flooring, sealing, bonding, refurbishment, and protective solutions, every Sika product is developed to ensure quality, reliability, and long-term performance.

Backed by over a century of global expertise and strong local support, Sika Ghana is committed to helping build safer, stronger, and more sustainable infrastructure across the country. Together, we are shaping projects that stand the test of time.

CONTENTS

05 Sika beyond expected
06 Sika over years of experience
07 Sika Ghana since 2021
08 Sika our values and principles
09 Concrete
Admixture
Sika® ViscoCrete®-3012 Plus
Sika® ViscoCrete®-90 HE
Sika ViscoFlow®-615
Sika ViscoFlow®-3050
SikaPlast®-2120
Sika® Plastiment®-230
Accelerator
SikaRapid®-105
Set Retarders
Plastiretard
Fiber
SikaFiber® Polypropylene 12/32
Admixture for precast
SikaPaver®-205 HC
Waterproofing Admixture
SikaControl®-120 WT
Release Agent
Sika® Separol®-205
Curing compound
Sika® Antisol®-203

23 Waterproofing
Joint Waterproofing
Sika Waterbar® V EG
Sika Waterbar® D EG
Waterproofing Admixture
Super Sikalite®
SikaCem®-520 Waterproofer GH
Bitumen Waterproofing
Sika® Igolflex®-155 EG
Cementitious Waterproofing
SikaTop® Seal-107
SikaTop®-501 Seal
Rapid Cementitious Water Stop
Sika MonoTop®-180 Water Plug
Swelling profile
SikaSwell® A

33 Roofing
Bituminous Waterproofing Membrane
SikaShield® P24 PE EG Delta 4 mm
SikaShield® P24 MG 5,5 kg/m²
SikaShield® P24 PE IN 3 mm
Liquid Waterproofing Membrane
Sikalastic®-505 BH

CONTENTS

38 Building finishing
Tile Adhesive
SikaCeram®-80
SikaCeram®-103 Stop Water
SikaCeram®-203 Universal
Tile Grout
SikaCeram®-510 Joint
SikaCeram® EpoxyGrout

44 Flooring
Epoxy Primer
Sikafloor®-161
Epoxy Floor Coating
Sikafloor®-264 SG
Floor Hardener
Sikafloor®-3 QuartzTop
Sikafloor® CureHard-24
Polyurethane Cement Floor Coating
Sika® Ucrete®

50 Sealing & bonding
Sealant & Adhesive
Sikaflex®-11 FC Purform®
Acrylic sealant
SikaSeal® Acrylic
Silicone Sealant
Sikasil® MultiPlus/-T
Foam Sealant
Sika Boom®-180
Sealing Tape
Sika® MultiSeal
Sikadur-Combiflex® SG System

57 Refurbishment
Rigid Bonding
Sikadur®-31 CF Slow
Epoxy Grouting
Sikadur®-42 MP Slow
Cemet Grouting
SikaGrout®-217
Anchoring
SikaAnchorFix®-2+ Tropical
Repair Mortar
Sika MonoTop®-620 GH
Sika MonoTop®-412 N
Bonding Agent
SikaLatex®
Protective Coating
Sikagard®-180
Water Repellent
Sikagard®-701 W

67 Note

SIKA

BEYOND EXPECTED

Sika is a Swiss specialty chemicals company and a global leader in solutions for sealing, bonding, damping, reinforcing, and protecting in construction and industry.

Driven by innovation and people, Sika develops high-performance technologies that improve durability, efficiency, and sustainability worldwide. Present in more than 100 countries, Sika combines Swiss quality with local expertise to support its customers every day.

SIKA AT A GLANCE

33,700	EMPLOYEES
103	COUNTRIES
400+	FACTORIES WORLDWIDE
7	NEW/EXPANDED FACTORIES IN **2025**
121	NEW PATENTS IN 2025
6	ACQUISITIONS IN 2025
11.2 BN	NET SALES IN 2025 (IN CHF)



SIKA

OVER 100 YEARS OF EXPERIENCE


HISTORY

Driven by his entrepreneurial spirit, chemist Kaspar Winkler laid the foundation of Sika in 1910. Born into a modest family of shoemakers in Austria, he later emigrated to Switzerland, where he invented Sika-1, a fast-setting waterproofing additive used in the Gotthard Tunnel, enabling the electrification of this key railway link in Europe.



Recognizing global demand for his innovation, he expanded the company internationally, and by the 1930s Sika had established 15 subsidiaries across Europe, the United States, Argentina, Brazil, and Japan, creating new markets for construction chemicals.

SIKA'S PRESENCE

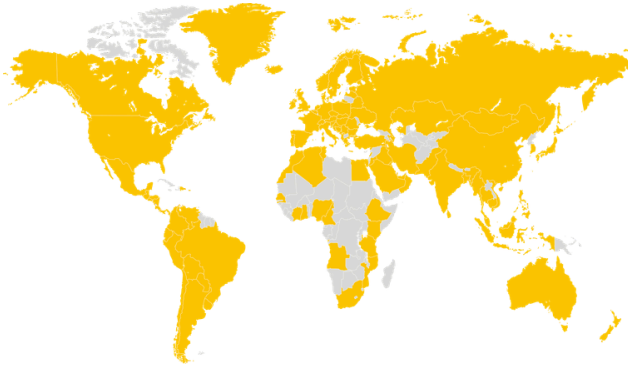

SIKA

SINCE 2021

Sika Chemicals Ghana Ltd, a subsidiary of the Swiss company Sika AG, was established in 2021. After many years of presence in the African market, Sika decided to expand its operations by establishing a new production site in West Africa.

Located in Kpone, Sika Chemicals Ghana Ltd manufactures mortars, admixtures, waterproofing solutions, adhesives, and concrete products. These products are used in the construction of residential and commercial buildings, bridges, roads, factories, industrial facilities, automotive applications, and many other projects across Ghana.

SIKA GHANA AT A GLANCE

48	EMPLOYEES
08	DISTRUTORS
01	PLANT
01	SIKA ACADAMY
01	EQUIPED LAB
+51	PRODUCTS
08	TARGET MARKETS



SIKA

OUR VALUES AND PRINCIPLES

The Sika Spirit is a synonym of the strong set of values and principles which makes up the DNA of the company. Five management principles express the corporate culture and are the foundation of future success:

01 CUSTOMER FIRST

02 COURAGE FOR INNOVATION

03 SUSTAINABILITY & INTEGRITY

04 EMPOWERMENT & RESPECT

05 MANAGE FOR RESULTS



The future success of our company depends not only on the pursuit of a sound strategy, but also on the trust and commitment of all our employees.



CONCRETE



Sika® ViscoCrete®-3012 Plus

Multi-purpose Superplasticizer / High Range Water-Reducing Admixture

ADVANTAGES



- High water reduction for improved concrete performance.
- Excellent workability and flowability.
- Extended slump retention.
- Improves concrete cohesion and pumpability.
- Reduces segregation and bleeding.
- Increases early and ultimate compressive strength.
- Produces dense, durable concrete with reduced permeability.

USES



- Ready-mix pumped concrete & Precast concrete.
- Reinforced concrete structures.
- High-performance and high-strength concrete.
- Concrete requiring extended workability during transport and placement.

APPLICATION INSTRUCTIONS

- Add to the mixing water before batching or directly into freshly mixed concrete.
- Do not add directly to dry cement or aggregates.
- Recommended dosage: 0.8–2.5% by weight of cement.

Colour
Dark Brown Liquid

Consumption
0.8–2.5% by weight of cement

Shelf life
12 months

Packaging
IBC: 1050 Kg
Gal.: 5 Kg / 20 Kg

Sika® ViscoCrete®-90 HE

High performance superplasticizer

ADVANTAGES



- High early strength development
- Powerful water reduction
- Excellent flowability
- Improved shrinkage and creep behavior
- Chloride-free
- Reduced closure times for repairs of roads and run way

USES

- Precast concrete
- Fast-track concrete
- In-situ concrete requiring fast stripping
- Self-Compacting Concrete (SCC)

APPLICATION INSTRUCTIONS



- Add to mixing water or directly into fresh concrete.
- Do not add directly to dry cement or aggregates.
- Recommended dosage: Dosage: 0.2-0.8% for medium workability; 1.0-2.0% for high workability and SCC.

Colour
Light yellowish liquid

Consumption
0.2 - 0.8% by weight of cement

Shelf life
12 months

Packaging
IBC: 1100 Kg
Gal.: 20 kg

Sika ViscoFlow®-615

Water reducing and workability retaining admixture

ADVANTAGES

- Extremely powerful water reduction
- Keeps workability for extended time
- Controlled retarding properties
- Reduced creeps and shrinkage
- Slump retention
- Improved early and ultimate strengths



USES

- Ready-mix & precast concrete.
- High strength concrete applications
- Concrete requiring high water reduction.
- Hot weather concreting
- Concrete requiring extended transportation and workability.
- Concrete produced with highly reactive cements.



APPLICATION INSTRUCTIONS

- Add to the mixing water or directly into the concrete during batching.
- Do not add directly to dry cement or aggregates.
- Recommended dosage: 0.5–2.0% by weight of cement.

Colour
Pale yellow/Light Brown Liquid

Consumption
0.5–2.0% by weight of cement

Shelf life
12 months

Packaging
BC: 1050 Kg
Gal.: 20 Kg

Sika ViscoFlow®-3050

Multi-purpose Superplasticizer / High Range Water-Reducing Admixture

ADVANTAGES



- Extended workability & slump retention.
- High water reduction.
- Fast strength development.
- Improved flow, compaction & durability.
- Reduced shrinkage.
- Chloride-free for reinforced concrete.

USES

- Ready-mix and precast concrete applications.
- Ideal for long transport distances and extended workability, up to 3 hours or more depending on dosage.
- High water reduction up to 35%.
- Produces plastic to highly flowable concrete.
- Suitable for high-strength concrete.
- Compatible with air-entrained concrete.
- Recommended for reactive cements and demanding precast operations.



APPLICATION INSTRUCTIONS

- Added with the mixing water or introduced at the end of the mixing process.
- Recommended dosage: 0.3% - 1.2% by weight of cement.

Colour	**Consumption**	**Shelf life**	**Packaging**
Brown Liquid	0.2 - 0.8% by weight of cement	12 months	BC: 1050 Kg Gal.: 20 Kg

SikaPlast®-2120

Concrete hardener / Multi purpose water reducing superplasticizer

ADVANTAGES

- Improved early and ultimate strengths
- Water reduction
- Extended workability
- Reduced segregation and bleeding
- Improved durability and impermeability



USES

- Ready-mix & precast concrete.
- High-quality structural concrete.
- Concrete requiring high water reduction.
- Concrete requiring extended workability.
- Concrete produced with highly reactive cements.

APPLICATION INSTRUCTIONS

- Add to the mixing water or directly into the concrete during batching.
- Do not add directly to dry cement or aggregates.
- Recommended dosage: 0.8–2.0% by weight of cement.



Colour
Light/Dark Brown
Liquid

Consumption
0.8–2.0% by
weight of cement

Shelf life
12 months

Packaging
IBC: 1050 Kg
Drum : 200 Kg
Gal. : 20 Kg / 5 Kg

Sika® Plastiment®-230

Water reducing concrete admixture

ADVANTAGES

- Improved workability without increased water
- Reduced water without loss of workability
- Increased strengths
- Improved surface finish
- Unaffected setting times
- Reduced shrinkage and creep



USES

- Use as a plasticizer for high-quality structural concrete.
- Exposed surfaces are important
- Maximum performance is desired
- Placing conditions are difficult
- Precast elements are produced



APPLICATION INSTRUCTIONS

- Add 0,4 - 3 % by weight of cement of Sika® Plastiment®-230 to the mixing water or simultaneously during batching.
- Suitable for use in concrete batching plants.
- Minimum wet mixing time of 60 seconds recommended.
- Can also be added before discharge, followed by at least 5 minutes of additional mixing.

Colour
Yellowish Brown

Consumption
0,4 - 3 % by weight of cement

Shelf life
12 months

Packaging
IBC: 1000 Kg
Drum : 200 Kg
Gal.: 20 Kg / 5 Kg

CONCRETE

Accelerator

SikaRapid®-105

Hardening accelerator

ADVANTAGES

- Faster turnaround of formwork
- Reduces the need for heat or steam curing
- Enables faster construction and early load-bearing capacity
- Supports early strength development in blended-cement concrete
- Chloride-free and suitable for reinforced concrete



USES

- Precast concrete
- Ready-mix concrete requiring early demolding
- Slip-formed concrete
- Applications where minimum time delays are critical
- Concrete containing blended cements



APPLICATION INSTRUCTIONS

- Add to water or directly into the concrete mixer.
- It may also be added to ready-mix concrete on site, with adequate mixing to achieve a uniform consistency.

Colour
Clear liquid to pale yellow

Consumption
500–2000 ml/100 kg of cementitious

Shelf life
12 months

Packaging
IBC: 1000 Kg
Gal.: 20 Kg

CONCRETE

Set Retarder

Plastiretard

Set-retarding admixture for concrete



ADVANTAGES


- It slows the start of setting and preserves the fluidity during the period of time required for placing concrete
- It improves the workability even though the quantity of mixing water is reduced
- It improves the mechanical strengths

USES

- Concreting with high temperature
- Long-duration concrete use
- Long-duration concrete transport

APPLICATION INSTRUCTIONS

- Added with the mixing water or introduced at the end of the mixing process.
- Recommended dosage: 0,05 to 2,0 % by weight of cement.

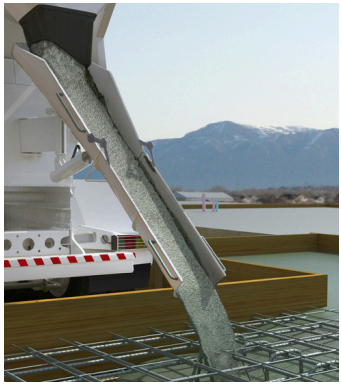

Colour
Light yellow

Consumption
0,05 to 2,0% by weight of cement

Shelf life
12 months

Packaging
IBC: 1000 Kg
Drum : 200 Kg
Gal.: 20 Kg

SikaFiber® Polypropylene 12/32

Polypropylene Fibre for Concrete

ADVANTAGES



- In shotcrete: Improves the ability to apply greater thicknesses in a single pass
- Reduces rebound
- Enhances early age crack control
- Reduces line pressure in spray pumps
- May reduce the dosage of set accelerator
- Reduces future repair costs

USES

- Concrete
- Shotcrete
- Cementitious overlays
- Industrial floor slabs
- Patch repairs to pre-cast elements
- Water retaining structures
- High performance concrete
- Precast concrete tunnel segment



APPLICATION INSTRUCTIONS

- Add 0.6 kg/m^3 to the concrete mix.
- Add to the mixer after all ingredients and water.
- Mix until fibres are uniformly dispersed.

Colour
White fiber

Consumption
0.6 Kg/m^3

Shelf life
12 months

Packaging
Bag : 0.6 Kg

CONCRETE

Admixture for precast

SikaPaver®-205 HC

High performance compaction aid for semi-dry / no-slump concrete product


ADVANTAGES



- Improves mould filling, compaction, and demolding efficiency.
- Enhances green strength and ensures consistent product quality.
- Reduces defects, stickiness, and production variations.
- Optimizes mix design and production costs.
- Improves surface finish, strength, and long-term durability.

USES

- Suitable for all semi-dry/no-slump concrete applications.
- Ideal for machine-made concrete products with immediate demolding.
- Used for mold pavers, kerbstones, blocks, pipes, manholes, and hollow-core slabs.

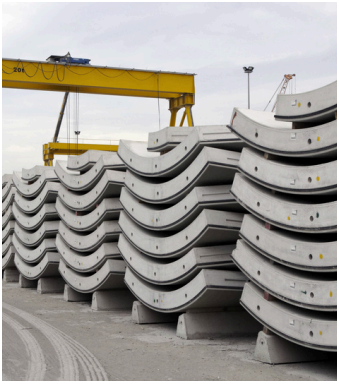

APPLICATION INSTRUCTIONS

- Added with the mixing water or introduced at the end of the mixing process.
- Recommended dosage: 0.3% - 1.2% by weight of cement.

Colour
Brown Liquid

Consumption
0.3% - 1.2% of cement weight

Shelf life
12 months

Packaging
IBC: 1000 Kg
Drum : 200 Kg
Gal.: 20 Kg/ 5 Kg

SikaControl®-120 WT

Waterproofing admixture for mortar and concrete

ADVANTAGES

- Waterproofs mortar & concrete
- Reduces water permeability
- Easy dosing
- Chloride-free
- Compatible with most cements



USES

- Mortar and concrete waterproofing
- Swimming pools
- Foundations
- Water tanks & treatment plants
- Basements, walls & façades
- Channels & sewers



APPLICATION INSTRUCTIONS

- Add to mixing water or at the end of mixing.
- Do not add to dry mortar or concrete.
- Recommended dosage: 0.5-2.0% by weight of cementitious materials.

Colour
Milky White

Consumption
0.5-2.0 % by weight of cement

Shelf life
12 months

Packaging
IBC: 1050 Kg
Gal.: 20 Kg

CONCRETE

Release Agent

Sika® Separol®-205

Oil based, anti-corrosive shutter release agent

ADVANTAGES

- Clean and easy formwork release
- Smooth, uniform concrete finish
- Extends formwork life
- Reduces concrete contamination
- Economical to use




USES

- Steel formwork
- Plywood formwork
- High-density plastic formwork

APPLICATION INSTRUCTIONS

- Apply a thin, uniform coat on clean, dry formwork.

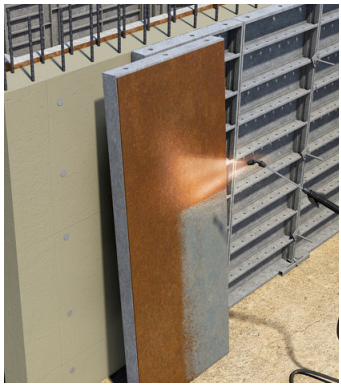

Colour
Clear to yellowish brown liquid

Consumption
20 to 70 m^2/L

Shelf life
12 months

Packaging
IBC: 1000 Kg
Drum : 200 Kg
Gal.: 20 Kg

Sika® Antisol®-203

Concrete curing agent



ADVANTAGES

- Improves the surface appearance
- Reduces cracking
- Ensures achievement of required strengths
- Reduces shrinkage
- Controls cement hydration
- Reduces dust formation
- Improves freeze / thaw resistance
- Alleviates other costly curing methods

USES

- Ready-to-use spray-applied curing compound for fresh concrete.
- Large areas of exposed concrete such as: Roads and Highways, Runways, Roof decks, Hangars and loading areas, Retaining walls, Pre-stressed structures, Irrigation channels, Civil Engineering structures, Industrial floor slabs.



APPLICATION INSTRUCTIONS

- Apply by spray on freshly placed concrete.
- Ensure complete surface coverage for optimal curing performance.

Colour
Liquid white

Consumption
0,15–0,20 kg/m^2

Shelf life
12 months

Packaging
IBC: 1000 Kg
Gal.: 200 Kg

WATERPROOFING



Sika Waterbar® V EG

Internal waterbars for joint sealing in watertight concrete construction




ADVANTAGES

- Cost-effective range of products.
- Suitable for medium levels of hydrostatic pressure and exposure / stress.
- Resistant to all natural mediums in soil and the groundwater, including acidic and alkaline conditions.
- Weldable.

USES

- Sealing construction joints in concrete structures.
- Waterproofing joints in in-situ concrete construction.
- Suitable for residential and commercial basements and underground car parks.

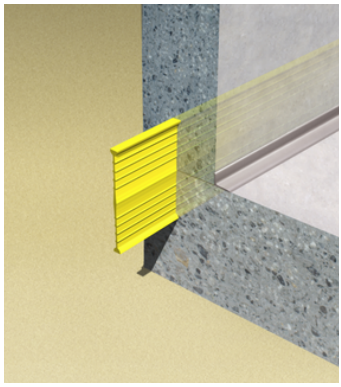

APPLICATION INSTRUCTIONS

- Install and fix waterbars in position before concrete casting.
- Use prefabricated sections where possible and limit site welds to butt joints.
- Protect and clean waterbars before concreting until fully embedded in concrete.

AVAILABLE PRODUCTS

- Sika Waterbar® V-20
- Sika Waterbar® V-24

Colour
Grey
Yellow


Consumption
Depending on usage

Shelf life
36 months

Packaging
Rolls: 20cm / 24cm

Sika Waterbar® D EG

Internal waterbars for expansion joints sealing in watertigjt concrete construction




ADVANTAGES

- High strength and elongation
- Long-lasting flexibility
- Good weldability
- Consistently uniform joint tape
- Resistant to aggressive substances naturally present in groundwater and soil

USES

- Sealing construction joints in concrete structures.
- Waterproofing joints in in-situ concrete construction.
- Suitable for residential and commercial basements and underground car parks.

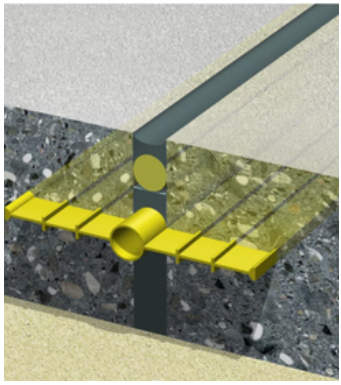

APPLICATION INSTRUCTIONS

- Install and fix waterbars in position before concrete casting.
- Use prefabricated sections where possible and limit site welds to butt joints.
- Protect and clean waterbars before concreting until fully embedded in concrete.

AVAILABLE PRODUCTS

- Sika Waterbar® D-19
- Sika Waterbar® D-24

Colour
Yellow

Consumption
Depending on usage

Shelf life
60 months

Packaging
Roll: 19cm / 24cm

WATERPROOFING

Waterproofing Admixture

Super Sikalite®

Powder waterproofing additive for mortars and concrete

ADVANTAGES




- Excellent waterproofing.
- Improved smoothness.
- Longer operating time.
- Reduces shrinkage by reducing the mixing water.
- Improves the frost resistance of hardened mortars.


USES

- Waterproofing additive for mortars and concretes (Walls, Facades & Swimming pools)
- Construction of waterproof screeds.

APPLICATION INSTRUCTIONS

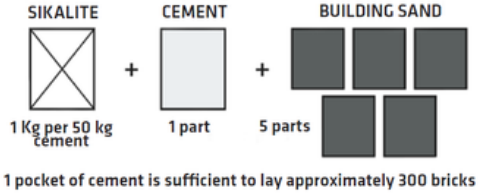

1 pocket of cement is sufficient to lay approximately 300 bricks

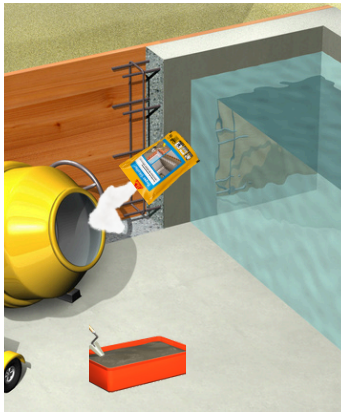

Colour
White

Consumption
1 Kg per 50 Kg cement

Shelf life
12 months

Packaging
Pouch: 1 Kg

SikaCem®-520 Waterproofer GH

Waterproofing admixture for mortar and concrete

ADVANTAGES



- Good waterproofing characteristics by obstruction of capillary net.
- Compatible with all type of cements, except aluminous cement.
- Easy dosing.
- Chloride-free

USES

- Waterproofing admixture of mortar and concrete
- Swimming pools, foundations, water tanks and treatment plants
- Façades, walls, basements
- Channels and sewers



APPLICATION INSTRUCTIONS

- Add to mixing water or at the end of mixing.
- Suitable for on-site mixing or concrete plants.
- Do not add directly to dry mortar or concrete mixes.
- Recommended dosage: 0.5–2.0% by weight of cement.

Colour
Milky White

Consumption
0.5-2.0% by weight of cement

Shelf life
12 months

Packaging
Gal.: 1 Kg / 5 Kg / 20 Kg

Sika® Igolflex®-155 EG

Rubber bitumen emulsion


ADVANTAGES



- Ready-to-use, solvent-free, and economical.
- Suitable for interior applications because of non-toxic and non-flammable content.
- Suitable for hot and tropical climate conditions.
- Adheres perfectly to all kind of surfaces, even when the surface is moist.
- It can be used for damp surfaces.
- Good resistance to mild chemicals and salts.

USES

- Protect concrete surfaces in all horizontal and vertical applications.
- Primer before the application of bitumen roll membranes.
- Suitable for waterproofing & damp-proofing retaining walls, basements, & concrete foundations in contact with soil.

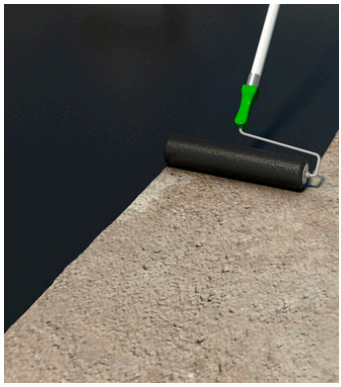

APPLICATION INSTRUCTIONS

- Clean and prepare the substrate.
- Apply 1st coat (0.35-0.50 kg/m^2).
- Allow to dry for min. 2 hours.
- Apply 2nd coat (0.25-0.30 kg/m^2).
- Allow curing before backfilling (48h).

Colour	Consumption	Shelf life	Packaging
Black Liquid	0.35-0.50 kg/m^2/1st coat 0.25-0.30 kg/m^2/2nd coat	12 months	Pail: 18 Kg

WATERPROOFING

Cementitious Waterproofing

SikaTop® Seal-107

Flexible, waterproofing and protective slurry mortar

ADVANTAGES

- Reliable waterproof protection
- Flexible coating for crack bridging
- Easy application on site
- Long-lasting durability
- Strong adhesion to concrete substrates
- Ideal for tropical environments



USES

- Water tanks & Swimming pools
- Bathrooms and showers
- Balconies and terraces
- Basements
- Foundations and retaining walls



APPLICATION INSTRUCTIONS

- Mix Part A liquid with Part B powder until homogeneous
- Apply on clean, sound and pre-dampened substrate
- Apply 2 coats by brush, roller or spray
- Allow first coat to harden before applying second coat

Colour
Colour
Grey

Consumption
~2.0 kg/m²/mm
(1 Bag yield ~14 L)

Shelf life
12 months

Packaging
Part A Gallon: 5 Kg
Part B Bag: 20 Kg

WATERPROOFING

Cementitious Waterproofing

SikaTop®-501 Seal

Cement Based Capillary Crystalline Waterproofing Material

ADVANTAGES



- Easy to prepare and apply by brush.
- Resistant to negative and positive water pressure.
- Longer operating time.
- Protects concrete.
- Reduces shrinkage by reducing the mixing water.
- Improves the frost resistance of hardened mortars.

USES

- Waterproofing water tanks, tunnels and elevator pits.
- Interior and exterior waterproofing of vertical and horizontal concrete surfaces
- Waterproofing supporting walls, dams and harbours

APPLICATION INSTRUCTIONS



- Clean and dampen the substrate with clean water before application.
- Mix with 7.0-8.0 L of water per 25 kg until smooth and homogeneous.
- Apply the first coat by brush and the second coat after 3–5 hours.
- Protect the coating from rapid drying and keep the surface moist for 5–7 days.

Colour	**Consumption**	**Shelf life**	**Packaging**
Grey	1 Kg/m^2/coat	6 months	Bag: 25 Kg

Sika MonoTop®-108 Water Plug

Fast-setting, portland-cement water-stopper

ADVANTAGES

- Rapid set time.
- Excellent bond to concrete and masonry.
- Resists sewage.
- Use on the vertical or horizontal.
- Indoor or outdoor applications



USES

- Stops pressure leaks and water seepage in concrete and masonry structures.
- For grouting railings of wood, concrete, and metal.
- Suitable for basements, sumps, pools, tunnels, sewers and wastewater treatment plants.

APPLICATION INSTRUCTIONS

- Remove loose material, clean the cavity, and lightly dampen the substrate.
- Mix with clean water at a 1:4 water-to-powder ratio without over-wetting.
- Press firmly into the crack or cavity, hold until set, and finish flush with the surface.



Colour
Concrete grey

Consumption
Depending on usage

Shelf life
12 months

Packaging
Bag: 5 Kg

SikaSwell® A

Hydrophilic swellable joint sealing profiles


ADVANTAGES



- Highly economical joint sealing solution
- Unique properties fill small cracks and voids
- Versatile solution for joints and details
- Permanently water resistant (wet & dry cycles)
- Resistant to various chemical substances
- Easy and fast to apply
- Can be applied on different substrates
- BBA system approvals with SikaSwell S-2

USES

- Construction joints
- Construction joints in cable ducts Pipe and steel work penetrations through walls and floor slabs
- Around all types of penetrations and connection joints

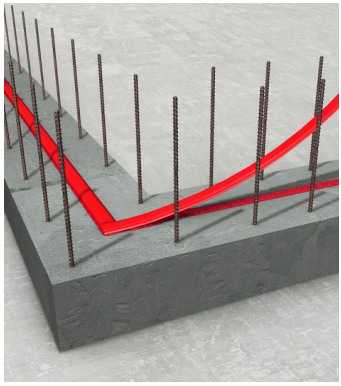

APPLICATION INSTRUCTIONS

- Clean and prepare the substrate.
- Fix the profile using adhesive or mechanical fixing.
- Place and compact the concrete.

AVAILABLE PRODUCT

- SikaSwell® A 2010

Colour
Red profile

Consumption
Depending on usage

Shelf life
36 months

Packaging
Roll : 20 mm x 10 mm x 10 m

ROOFING

SikaShield® P24 PE EG Delta 4 mm

APP modified bituminous waterproofing membrane with a thickness of 4 mm.

ADVANTAGES

- Excellent waterproofing performance
- Good mechanical strength
- Easy torch application
- Durable
- Fully bonded



USES

- Roof waterproofing systems
- Balconies and terraces under a heavy protection layer such as tiles or gravel.
- Flat and sloping roofs under protective layers or ballast
- Basements and underground structures
- Podiums and concrete decks



APPLICATION INSTRUCTIONS

- Apply the membrane using the torch-on method on a properly prepared and primed substrate.
- Ensure side and end laps are fully sealed to achieve a continuous waterproofing layer.

Colour
Black

Consumption
Depending on usage

Shelf life
12 months

Packaging
Roll: 10 × 1 m

ROOFING

Bituminous membrane

SikaShield® P24 MG 5,5 kg/m²

APP modified bituminous waterproofing membrane with a mineral granule surface finish

ADVANTAGES

- Excellent waterproofing performance
- High mechanical resistance
- Easy torch-on application
- Durable and long-lasting
- Fully bonded waterproofing system



USES

- Reroof and new construction roof for commercial and residential.
- Dome shaped roofs.
- Bridge & Viaducts.
- Rooftop gardens.
- Patio decks.



APPLICATION INSTRUCTIONS

- Apply using the torch-on method onto a clean, dry, and suitably prepared substrate.
- Ensure all overlaps are properly sealed to provide a continuous waterproofing barrier.

Colour
Black

Consumption
Depending on usage

Shelf life
12 months

Packaging
Roll: 10 × 1 m

SikaShield® P24 PE IN 3 mm

Plastomeric bituminous membrane surfaced with PE foil and flexible at 0 °C

ADVANTAGES

- Easy to install by torching method
- Fully bonded
- Good durability
- Good mechanical properties (tensile, tear, shear)



USES

- Balconies and terraces under heavy protection layers
- Flat and sloping roofs under protective layers or ballast
- Car park decks and wet areas
- Basements and below-ground structures
- Reinforced concrete slabs, decks and podiums
- Reinforced concrete walls
- Base sheet for multi-layer waterproofing systems



APPLICATION INSTRUCTIONS

- Apply using the torch-on method onto a clean, dry, and suitably prepared substrate.
- Ensure all overlaps are properly sealed to provide a continuous waterproofing barrier.

Colour
Black

Consumption
Depending on usage

Shelf life
12 months

Packaging
Roll: 10 × 1 m

Sikalastic®-505 BH

Acrylic liquid applied roof coating

ADVANTAGES



- Increases solar reflection compared to darker sub strates, subsequently enhances energy efficiency by reducing cooling cost
- One component ready to use
- Excellent adhesion on porous and non-porous sub strates
- Water vapour permeable

USES

- For exposed roof coating solutions in both new and refurbishment construction
- For exposed roofs with many details and complex geometry when accessibility is limited
- For cost efficient life cycle extension of failing exposed roofs



APPLICATION INSTRUCTIONS

- Clean and prepare substrate
- Apply suitable primer if required
- Mix before use for 1 min at 300-500 rpm
- Apply 2-6 coats as per the required system
- Allow ~8 h drying time between coats
- Reinforce joints and details

Colour
White
Grey

Consumption
Consumption
1.0 – 2.1 kg/m^2

Shelf life
12 months

Packaging
Pail: 5 Kg / 15 Kg / 20 Kg

BUILDING FINISHING



TILING

Tile Adhesive

SikaCeram®-80

General Purpose Cementitious Tile adhesive for thin Bed Application

ADVANTAGES

- Very good adhesion
- Easy to use with excellent workability and thixotropic consistency
- Non toxic



USES

- Sikaceram® -80 is suitable for bonding: Ceramic tiles All types of very high absorption tiles.
- It can be used on substrates including: Concrete, Cement mortars & Bricks.
- It is suitable for internal applications on floor

APPLICATION INSTRUCTIONS

- Apply SikaCeram®-80 at 2–5 mm thickness using a notched trowel.
- Spread mortar evenly, covering only areas tileable within 10–20 minutes.
- Use "V" notched trowels for small tiles and square notched trowels for medium tiles.
- Press tiles firmly with a twisting action to ensure strong adhesion



Colour
Grey powder

Consumption
~4- 5.5 m^2/Bag

Shelf life
12 months

Packaging
Bag: 20 Kg

SikaCeram®-103 Stop Water

Water-Repellent Adhesive



ADVANTAGES

- Easy to use thanks to its very good handling and consistency
- Good adhesion to most substrates (concrete, mortar, stone, bricks, etc.)
- Water- resistant
- High durability and excellent protection
- Long practical service life

USES

SikaCeram-103® Stop Water can be used on most substrates, including concrete, mortar, stone, bricks, and porcelain ceramic tiles, on interior floors and walls.

APPLICATION INSTRUCTIONS

- Apply SikaCeram-103® Stop Water with a notched trowel ensuring full tile rear coverage.
- Place tiles on fresh adhesive, pressing firmly for proper bonding.
- If a film forms, wipe the trowel over the adhesive layer without adding water



Colour
Grey powder
White powder

Consumption
~6.7 m^2/2 mm

Shelf life
12 months

Packaging
Bag: 20 Kg

SikaCeram®-203 Universal

Enhanced performance, Thixotropic, Cement based Tile Adhesive



ADVANTAGES

- Extended open time
- Highly thixotropic, no vertical slip
- Excellent adhesion to almost all types of substrates
- Fast application, easy to apply
- Weather resistant
- Applicable up to 10mm

USES

SikaCeram®-203 Universal works with ceramic, granite, marble, and natural stone tiles. It applies on concrete, mortar, existing tiles, and primed non-absorbing substrates, suitable for interior and exterior floors and walls in heavy-use areas.



APPLICATION INSTRUCTIONS

- Apply SikaCeram®-203 Universal with a notched trowel, ensuring full tile rear coverage and proper bonding.
- Select the correct trowel size for tile dimensions; use double-spreading for larger tiles.
- Clean tools immediately with water; hardened material must be removed mechanically.

Colour
Grey powder
White powder

Consumption
~2 - 7Kg/m^2 at 6-15 mm

Shelf life
12 months

Packaging
Bag: 20 Kg

SikaCeram®-510 Joint

Grout for tiles


ADVANTAGES

- Good adhesion to tile surfaces.
- Easy to mix and apply.
- Resistant to abrasion and frost.
- Available as a coloured powder.
- Non-toxic, with a working time of approximately 1.5 hours.



USES

- Grouting wall and floor tiles.
- Suitable for porcelain stoneware, ceramic tiles, terracotta, glass paste mosaics, limestone and granite.
- Suitable for narrow joints between 1 and 6 mm wide.

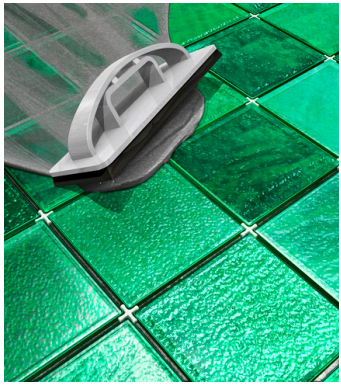

APPLICATION INSTRUCTIONS

- Mix with clean water at approximately 28% of the powder weight until smooth and lump-free.
- Apply using a rubber grout float, pressing the grout firmly into the joints, then clean excess grout from the tile surface at the appropriate time.

Colour
White powder
Grey powder

Consumption
Depending on tile dimensions and joint width

Shelf life
12 months

Packaging
Pouch: 3 Kg

SikaCeram® EpoxyGrout

2-Component epoxy grout for joints, Class RG according to EN 13888


ADVANTAGES

- Good resistance against chemicals
- Optimum workability and easy use
- Very easy to clean
- High hardness



USES

- Grouting ceramic and stone wall and floor tiles in areas exposed to chemical or acid aggression
- Suitable for heavy-traffic floors, industrial warehouses, shopping centres and professional kitchens
- Ideal for swimming pools, including pools filled with seawater

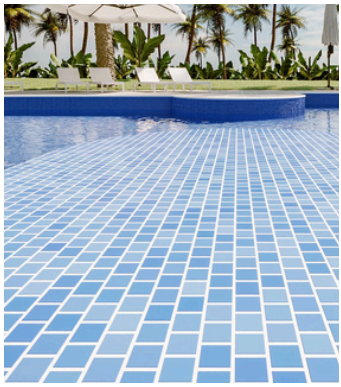

APPLICATION INSTRUCTIONS

- Ensure the substrate is clean, dry, and free from contaminants.
- Mix Components A and B thoroughly at the specified 94:6 ratio until a uniform creamy paste is obtained.
- Apply with a rubber squeegee, fill joints completely, remove excess, and clean with a damp sponge.

Colour
White

Consumption
90–2800 g/m²

Shelf life
24 months

Packaging
Pail: 5 Kg

FLOORING



Sikafloor®-161

2-part epoxy primer, levelling mortar and intermediate layer

ADVANTAGES

- Movement capability of ± 25 %
- Easy to apply and non-sagging
- Bonds well to most construction materials
- Good mechanical and weathering resistance
- Very low monomer content
- Adhesive-sealant with CE marking



USES

A professional primer for concrete, screeds, and epoxy mortars on low to medium absorbent substrates. It also serves as a binder and intermediate layer in Sikafloor® systems.

APPLICATION INSTRUCTIONS

- Apply on clean, sound, and dry or slightly damp substrates.
- Easy mixing of components A and B until a uniform consistency is achieved.
- Apply with spatula or trowel, ideal for structural bonding and repairs.
- Clean tools with Sika® Colma Cleaner before curing.



Colour
Part A: Brownish transparent liquid
Part B: Transparent liquid

Consumption
~1.9 kg/m²/mm

Shelf life
24 months

Packaging
Part A: 4.9 Kg
Part B: 19.7 Kg

Sikafloor®-264 SG

2-part High-build Solvent Free Epoxy Coating

ADVANTAGES

- Good chemical and mechanical resistance
- Easy application
- Liquid proof
- Gloss finish
- Slip resistant surface possible
- High Slip resistant surface when broadcasted



USES

A professional flooring system, serving as a roller coat for medium-wear concrete and a seal coat for broadcast systems in demanding environments like car parks and food industry areas.

APPLICATION INSTRUCTIONS

- Concrete strength ≥25 N/mm^2, pull-off ≥1.5 N/mm^2
- Substrate must be clean, dry, contaminant-free
- Mechanical preparation to remove laitance expose defects
- Repair voids, remove dust before applying the product



Colour
Part A:Colored liquid
Part B: Transparent liquid

Consumption
~0.25 - 0.3 Kg/m^2 on roller
~0.9 - 1.2 Kg/m^2 self-smoothing

Shelf life
12 months

Packaging
Pail: 28 Kg

Sikafloor®-3 QuartzTop

Mineral dry-shake floor hardener

ADVANTAGES

- Medium wear resistance rating
- Good impact resistance
- Cost-effective surface hardener
- Dust-proof
- Fast application & Easy to clean
- Quality-assured factory blending



USES

Sikafloor®-3 QuartzTop may only be used by experienced professionals. It is used as a Mineral dry-shake topping for monolithic floors in in iustrial, commercial and public buildings.

APPLICATION INSTRUCTIONS

- The Concrete must be cast, compacted, leveled, and checked for readiness.
- Trowel the surface, then scatter and work in Sikafloor®-3 QuartzTop in two stages.
- Finish edges and repeatedly trowel in perpendicular directions for the final surface.
- Cure immediately, seal with Sika® Antisol®, and complete joints and cleaning as specified



Colour
Powder/ Natural (Concrete grey)

Consumption
~4–6 Kg/m^2

Shelf life
6 months

Packaging
Bag: 25 Kg

Sikafloor® CureHard-24

Sodium Silicate Surface Hardener, Densifier and Impregnating Sealer


ADVANTAGES

- Ready to use and easy to apply
- Improves abrasion and chemical resistance
- Reduces dusting and improves surface cleanability
- Good penetration, non-yellowing, colourless and odourless



USES

Used for hardening and densifying new and existing concrete floors, making it suitable for warehouses, industrial plants, stores, shopping malls, parking structures and hangars, as well as for dust-proofing prefabricated concrete elements and protecting interior and exterior concrete surfaces.

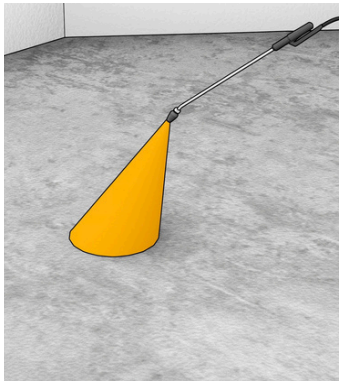

APPLICATION INSTRUCTIONS

- Ensure the concrete surface is sound, clean and free from dust, oil, grease, coatings and other contaminants.
- Apply evenly using a high-volume, low-pressure spray unit and work the product into the surface with a soft-bristle broom or floor scrubber.
- Allow the product to react, then rinse and remove excess material with a squeegee, wet vacuum or mop. A second coat may be required on porous surfaces.

Colour
Clear/Colorless

Consumption
0.15–0.25 L/m^2/coat (approximately 4–7 m^2/L/coat)

Shelf life
24 months

Packaging
Pail: 20 Kg

FLOORING

Polyurethane Cement Floor Coating

Sika® Ucrete®

Heavy-Duty Polyurethane Resin Flooring Systems

ADVANTAGES



- Exceptional resistance to chemicals, impact and abrasion.
- Withstands extreme temperature fluctuations and thermal shock.
- Dense, impervious and hygienic surface.
- Durable, low-maintenance and slip-resistant options available.
- Low-emission flooring solutions with long service life

USES

Sika® Ucrete® systems are ideal for demanding environments such as food and beverage processing, cold storage, dairies, pharmaceutical laboratories, production areas, chemical processing, engineering and industrial facilities.

Available products are Sika® Ucrete® MF for smooth application; Sika® Ucrete® MT for Rough application ; and Sika® Ucrete® UD 200 for High chemical resistance



APPLICATION INSTRUCTIONS

Mechanically prepare the substrate, repair defects and remove dust. Apply the specified primer and install the selected Sika® Ucrete® system at the recommended thickness using trained, specialist flooring applicators.

Colour
Red/Yellow/Green/ Orange/Grey/Blue/ Green-brown

Consumption
Depends on the selected Ucrete® system .

Shelf life
Varies by product.

Packaging
Multi-component flooring kits

SEALING & BONDING



Sikaflex®-11 FC Purform®

Multipurpose elastic adhesive and joint sealant

ADVANTAGES

- Movement capability of ± 25 %
- Easy to apply and non-sagging
- Bonds well to most construction materials
- Good mechanical and weathering resistance
- Very low monomer content
- Adhesive-sealant with CE marking



USES

Sikaflex®-11 FC Purform® is used as an adhesive to bond construction components and materials such as; concrete, masonry, reconstituted or cast stone, ceramic, wood, metal & glass. A sealant to seal vertical and horizontal joints.

APPLICATION INSTRUCTIONS

- Prepare substrate by cleaning and removing contaminants for strong adhesion.
- Prime or pre-treat surfaces depending on substrate type before bonding/sealing.
- Apply Sikaflex®-11 FC Purform® with a sealant gun, ensuring full contact and smooth finish
- Clean all tools and application equipment with Sika® Remover-208 immediately after use.



Colour
White
Grey

Consumption
Depends on joint dimensions

Shelf life
24 months

Packaging
Cartridge: 300 ml
Cylindrical: 600 ml foil pack

SEALING & BONDING

Acrylic sealant

SikaSeal® Acrylic

100-Premium Acrylic Joint & Gap Sealant


ADVANTAGES

- Excellent adhesion to common construction materials.
- Flexible, easy to apply and non-toxic.
- Can be sanded after curing for a smooth finish
- Can be painted over using water based paints.
- Uncured sealant can be cleaned with water.



USES

- Sealing low-movement joints around windows and doors.
- Filling cracks and gaps in brickwork, concrete and plasterboard.
- Sealing joints around ceramic tiles.
- Filling gaps in wood, aluminium and painted surfaces

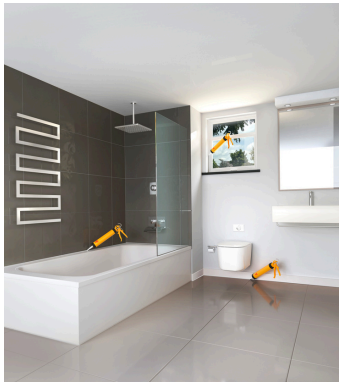

APPLICATION INSTRUCTIONS

- Ensure the substrate is clean, dry and sound.
- Apply using a sealant gun, fill the joint completely and tool to achieve a smooth finish.
- Protect from water for approximately 3 hours after application.

Colour
White

Consumption
Depending on joint depth

Shelf life
18 months

Packaging
Cartridge: 310 ml

Sikasil® MultiPlus/-T

Acetoxy curing, universal silicone sealant

ADVANTAGES

- Provides excellent resistance to fungal growth in humid environments
- Easy to apply with rapid curing properties.
- Excellent adhesion to glass, ceramic, painted surfaces and anodized aluminium without primer.
- UV resistant and remains elastic after curing.
- Smooth, glossy finish suitable for sanitary ware and ceramic tiles



USES

Sikasil® MultiPlus/-T can be used for sealing joints around baths, sinks, showers, kitchen furniture and urinals as well as sealing ceramic tiles, plumbing fixtures and cold rooms.



APPLICATION INSTRUCTIONS

- Ensure joint surfaces are clean, dry and free from dust, grease, oil and old sealant.
- Apply the ready-to-use sealant into the joint using a suitable caulking gun.
- Tool the sealant within 10 minutes and remove masking tape immediately after tooling.

Colour
Clear, White

Consumption
Depending on joint depth

Shelf life
18 months

Packaging
Cartridge: 280 ml

Sika Boom®-180

General purpose polyurethane self-expanding nozzle applied foam

ADVANTAGES

- Easy application with nozzle / ready to use
- Provides effective sound dampening and thermal insulation
- Excellent adhesion to many common construction materials
- Can be cut, trimmed, sanded and painted



USES

- Filling and insulating cavities and voids.
- Filling gaps around window and door frames.
- Insulating against cold, noise and draughts.
- Filling around pipes and conduit penetrations.

APPLICATION INSTRUCTIONS

- Clean and pre-dampen the substrate, then shake the canister well before use.
- Attach the nozzle and apply the foam with the canister held upside down.
- Fill cavities and joints in layers, allowing each layer to expand and cure before applying the next.



Colour
Light Yellow

Consumption
~8 mm minimum

Shelf life
15 months

Packaging
Canisters:300 ml / 500 ml/ 750 ml

Sika® MultiSeal

Self-adhesive bituminous sealing tape

ADVANTAGES

- Quick and easy to install.
- Excellent adhesion to many construction materials.
- Good resistance to weathering, UV exposure and heat.
- Suitable for application at low temperatures.
- Can be overpainted with most conventional paints.



USES

- Sealing and repairing roofs, including sheet metal work.
- Sealing roof tiles, gutters, chimneys and roof lights.
- Repairing facade elements, caravans, trailers and office containers.
- Sealing various types of ductwork.



APPLICATION INSTRUCTIONS

- Cut the tape to the required length.
- Remove the release film and firmly press onto a clean.
- Dry substrate using a roller or suitable tool.
- Overlap adjoining pieces by at least 50 mm.

Colour
Matt grey

Consumption
Appx. 1 linear metre of tape per metre of joint or crack

Shelf life
36 months

Packaging
Rolls: 3 m and 10 m

Sikadur-Combiflex® SG System

High-performance joint and crack sealing system


ADVANTAGES

- Excellent crack-bridging ability and accommodates significant joint movement.
- Provides a reliable watertight seal.
- Resistant to ageing, UV exposure and root penetration.
- Offers resistance to various chemicals and is suitable for drinking-water applications.
- Easy to install and available with different adhesive options



USES

- Sealing movement joints, construction joints and cracks.
- Sealing pipe penetrations and joints in structures subject to differential settlement.
- Waterproofing tunnels, culverts, basements and underground structures.
- Sealing swimming pools, sewage treatment plants and water reservoirs

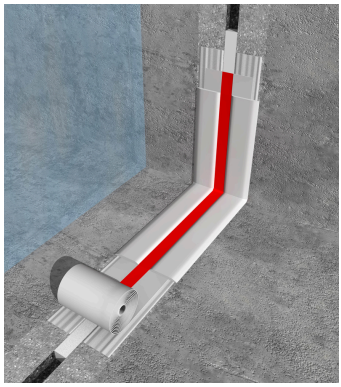

APPLICATION INSTRUCTIONS

- Prepare and clean the substrate,
- Weld tape connections, apply the mixed Sikadur® adhesive
- Press the tape firmly into the adhesive with a roller, then apply adhesive over the tape.

Colour
Grey tape

Consumption
Depending on tape width, and adhesive system

Shelf life
Tape : Unlimited
Adhesive : 24 months

Packaging
Tapes: SG-10 P/M and SG-20 P/M
Adhesive:CF Normal/Rapid

REFURBISHMENT



Sikadur®-31 CF Slow

2 component thixotropic epoxy adhesive and repair mortar

ADVANTAGES




- Easy application, fast results
- Strong bonding on most surfaces
- High-performance adhesive strength
- Shrinkage-free durability
- No primer needed
- Resistant to water and chemicals

USES

As a structural adhesive and mortar, a fast-setting rapid repair adhesive and mortar and a joint filling and crack sealing: Joint arris repair and crack sealing.

APPLICATION INSTRUCTIONS

- Apply on clean, sound, and dry or slightly damp substrates.
- Easy mixing of components A and B until a uniform consistency is achieved.
- Apply with spatula or trowel, ideal for structural bonding and repairs.
- Clean tools with Sika® Colma Cleaner before curing.

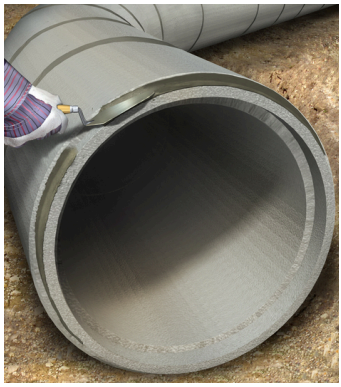

Colour
Component A: white
Component B: black
Mixed: concrete grey

Consumption
~1.9 kg/m²/mm

Shelf life
24 months

Packaging
Comp. A: 4 kg
Comp. B: 2 kg

Sikadur®-42 MP Slow

3-part, multi purpose epoxy grouting system

ADVANTAGES

- High early and compressive strength
- Moisture tolerant, non-shrink formulation
- Corrosion and chemical resistance
- Stress and impact resistant
- High vibration resistance performance
- Low thermal expansion coefficient




USES

High-strength epoxy grouting solution for base plates, machine foundations, bridge bearings, rail tracks, anchors and dowels, and structural void filling.

APPLICATION INSTRUCTIONS

- Ensure substrate is clean, sound, and free from contaminants.
- Premix Components A and B, then gradually add Component C.
- Mix until a uniform and homogeneous consistency is achieved.
- Pour or place the grout continuously to avoid air entrapment.
- Clean tools with Sika® Colma Cleaner immediately after use.

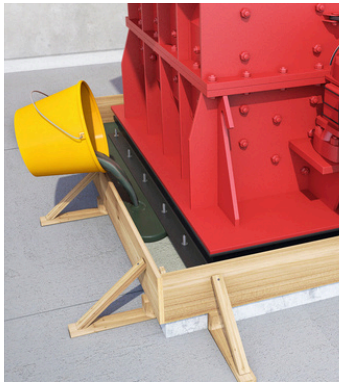

Colour
Component A & B: Transparent Liquid
Component C: Grey pouder

Consumption
2.13 kg/m²/mm

Shelf life
Comp. A : 24 months
Comp. B: 24 months
Comp. C: 12 months

Packaging
Comp. A: 4 Kg
Comp. B: 2 Kg
Comp. C: 24 Kg

REFURBISHMENT

Cement Grouting

SikaGrout®-217

High Performance, Shrinkage Compensated Grout

ADVANTAGES

- Chloride-free & non-corrosive
- High early strength
- Shrinkage-compensated
- Excellent adhesion
- Water, oil & vibration resistant
- Suitable for drinking water contact



USES

- Grouting of turbines, Grouting of beams or bedding for bridges' bearing devices.
- Assembly of prefabricated elements in metal, reinforced concrete or pre-stressed concrete
- Precision grouting of industrial equipment subject to chocks and vibrations



APPLICATION INSTRUCTIONS

- Prepare a clean and sound substrate.
- Mix with 3.25-3.5 L of water per 25 kg bag.
- Pour continuously into the prepared area.
- Allow to cure before commissioning.

Colour	**Consumption**	**Shelf life**	**Packaging**
Grey	3.25 to 3.5 L/Bag	12 months	Bag : 25 Kg

Sika AnchorFix®-2+ Tropical

Anchoring adhesive for medium to high loads

ADVANTAGES

- Fast Curing
- Standard guns can be used
- High load capacity
- Suitable for cracked concrete
- Non-sag, even overhead
- Drinking Water certified



USES

Fast curing anchoring adhesive for all grades of: Rebars/reinforcing steel, threaded rods, bolts and special fastening systems, concrete, solid masonry, steel, hard natural stone suitable for both hot and tropical climate conditions.



APPLICATION INSTRUCTIONS

- Drill and clean the hole.
- Inject the adhesive.
- Insert the anchor or rebar.
- Allow curing before loading.

Colour
Part A : White
Part B : Black
Part A+B : Grey

Consumption
Depends on anchor size

Shelf life
15 months

Packaging
Cartridge : 300 ml

Sika MonoTop®-620 GH

Polymer modified surfacing/ finishing structural repair mortar

ADVANTAGES



- Class R3 of EN 1504-3
- Easy to apply with adjustable consistency to improve workability
- Compatible with Sika® corrosion inhibition systems
- No bonding primer required, even for manual application
- Suitable for hand and machine application
- Low shrinkage, non-corrosive and A1 fire rated

USES

- Concrete/mortar pore sealer or levelling mortar
- Thin layer render over vertical or horizontal structural elements
- Repairing of minor defects (pores and honeycombed concrete)
- Restoration of edges and joints
- Suitable for restoration work



APPLICATION INSTRUCTIONS

- Substrate must be clean, sound and free of contaminants.
- Mix with 4.5-5.0 litres of clean water per 25 kg bag for at least 3 minutes.
- Apply with trowel or suitable spray equipment and finish as required.

Colour
Grey

Consumption
2.0 kg/m²/mm

Shelf life
6 months

Packaging
Bag : 25 Kg

REFURBISHMENT

Repair mortar

Sika MonoTop®-412 N

Fibre reinforced structural repair mortar

ADVANTAGES



- Class R4 of EN 1504-3
- Easy to apply by hand or machine
- Up to 50 mm per layer
- Very low shrinkage behaviour
- Sulphate resistant
- No bonding primer required
- Low permeability and A1 fire rating

USES

- Structural concrete repair and restoration.
- Strengthening of concrete structures.
- Repair of spalling and damaged concrete.
- Buildings, bridges and civil engineering structures



APPLICATION INSTRUCTIONS

- Prepare substrate and remove loose concrete.
- Mix with 3.6-3.9 litres of clean water per 25 kg bag until homogeneous.
- Apply by trowel or spray machine.
- Finish and cure appropriately.

Colour
Grey

Consumption
~ 19 kg/cm/m^2

Shelf life
12 months

Packaging
Bag : 25 Kg

REFURBISHMENT

Bonding Agent

SikaLatex®

Water resistant bonding agent and mortar admixture

ADVANTAGES

- Increased adhesion.
- Reduced shrinkage and cracking.
- Increased abrasion resistance.
- Reduced permeability.
- Improved workability.
- User friendly.
- Suitable on most common construction substrates.



USES

- Grouts and screeds.
- Patch repair mortars.
- Masonry mortars.
- Renders.
- Tile adhesives.



APPLICATION INSTRUCTIONS

Bonding :

1 Kg Sikalatex + 1 Vol Water + 50kg Cement bag + 1 Portion Sand

Repair Motor and Floor Screed:

1 Kg Sikalatex + 2 Vol Water + 50kg Cement bag + 1 Portion Sand

Colour
White liquid

Consumption
Depending on usage

Shelf life
12 months

Packaging
Gal.: 1KG / 5KG / 20KG

REFURBISHMENT

Protective Coating

Sikagard®-180

Epoxy-Based Two-Part Protective Coating for concrete


ADVANTAGES

- Glossy, hygienic and easy-to-clean finish
- Prevents microbial growth and ensures waterproofing
- High mechanical and chemical resistance
- Solvent-free formulation
- Easy application by brush, roller or spray



USES

Suitable for water tanks, power stations, refineries, food & beverage processing plants, and industrial facilities. Recommended for hospitals, laboratories, commercial kitchens, laundries, and hygienic areas. Provides chemical-resistant protection for walls, floors, storage areas, and containment structures.

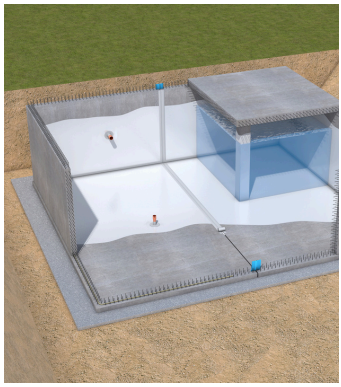

APPLICATION INSTRUCTIONS

- Concrete strength ≥25 N/mm^2, pull-off ≥1.5 N/mm^2
- Substrate must be clean, dry, contaminant-free
- Mechanical preparation to remove laitance expose defects
- Repair voids, remove dust before applying the product

Colour
Part A:Colored, liquid
Part B: Transparent, liquid

Consumption
~0.25 - 0.3 kg/m^2 on roller coating ~0.9 - 1.2 kg/m^2 self-smoothing

Shelf life
12 months

Packaging
Pail : 13.5 Kg

REFURBISHMENT

Water Repellent

Sikagard®-701 W

Micro-emulsion Water Repellent Impregnation

ADVANTAGES



- Excellent penetration into porous mineral surfaces.
- Reduces water absorption and protects against driving rain.
- Helps reduce the penetration of waterborne contaminants, including chlorides and salts.
- Maintains the substrate's water vapour permeability.
- Non-film-forming, economical, easy to use, and suitable for hot, tropical climates

USES

- Protecting concrete and cementitious render.
- Waterproofing natural and reconstituted stone.
- Protecting brickwork, aerated concrete and fibre cement.
- Providing water repellency to mineral paint coatings and other porous mineral substrates



APPLICATION INSTRUCTIONS

- Ensure the substrate is dry, clean and free from dust, dirt, oil, efflorescence and existing coatings.
- Dilute with clean water up to 1:3, then apply by low-pressure spray, brush or roller from top to bottom.
- Apply 2–3 coats wet-on-wet, ensuring the product does not run.

Colour
White/
Opaque Liquid

Consumption
150 g/m^2 (diluted)

Shelf life
12 months

Packaging
Pail : 20 Kg / 5 Kg

NOTE

A Global Company
But Local Partner

For more Sika information

We are Sika
Sika is a specialty chemicals company with a leading position in the development and production of systems and products for bonding, sealing, damping, reinforcing and protecting in the building sector and the motor vehicle industry. Sika's product lines feature concrete admixtures, mortars, sealants and adhesives, structural strengthening systems, industrial flooring as well as roofing and waterproofing systems.

© 2026 Sika Ghana Ltd. All rights reserved.

Our most current General Sales Conditions shall apply. Please consult the most current local Product Data Sheet prior to any use.

Contact
Phone +233 25 79 59 292
gha.sika.com

Sika CHEMICALS GHANA LTD
Kpone Rd, Kpone Katamanso
GK0028 Tema, Greater Accra

BUILDING TRUST